


6-1/2" Ø STAINLESS STEEL ANCHOR  
BOLTS IN 5/8" Ø HOLES


2 - 3-3/4" X 2" PICK SLOTS  
WITH 1 - 1" DIA. STEEL ROD  
EACH.

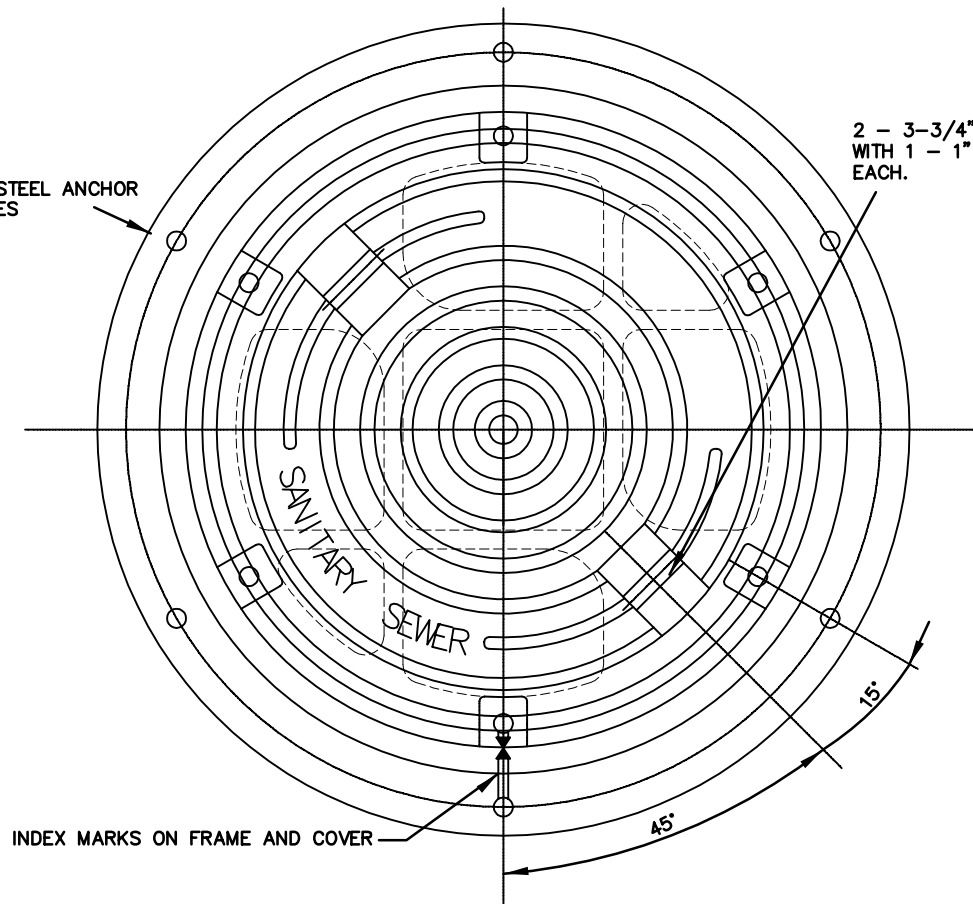

**ASSEMBLY PLAN VIEW**

6-5/8" DIA., 1-1/2"  
LONG STAINLESS  
STEEL BOLTS.

1/2" Ø X 6" LONG BENT  
STAINLESS STEEL  
ANCHOR BOLTS W/HEX.  
HEAD NUT - 6 REQ'D.

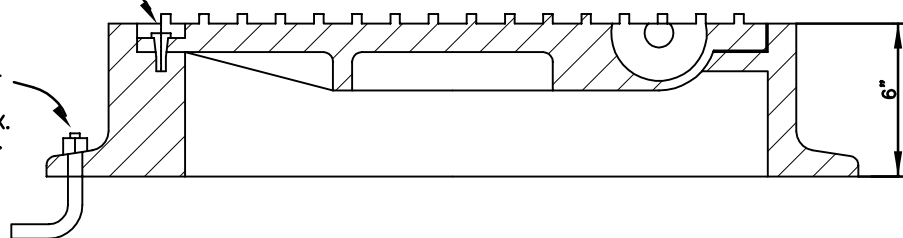


**ASSEMBLY CROSS SECTION**

**GENERAL NOTES:**

1. THE HORIZONTAL BEARING SURFACES ARE TO BE MACHINE FINISHED.
2. FOR A SEAL BETWEEN THE RING FRAME AND COVER A 1/4" Ø NEOPRENE "O-RING" GASKET SHALL BE AND INSTALLED BY THE MANUFACTURER. THE LOCATION SHALL BE AS PER THE MANUFACTURER'S STANDARDS BUT SHALL BE SUBJECT TO THE APPROVAL OF THE CITY ENGINEER.
3. THE SOLID LID WILL BE PROVIDED WITH MANUFACTURER'S STANDARD LETTERING SHOWING "SANITARY SEWER".
4. NOT ALLOWED IN TRAFFIC AREA.

**PRESSURE MANHOLE  
LID AND FRAME**

**CITY OF FRISCO, TEXAS  
STANDARD CONSTRUCTION  
DETAILS**



The seal appearing on this document  
was authorized by Frank E. Jaromin,  
P.E. 80919, on September 9, 2002.

DATE: 07/24/02  
DRAWN BY: WLW  
APPROVED BY: FEJ

SHEET NO. : S05